

### ● 性能规范 Technical Data


规格: DN50-1200  
公称压力: PN10/PN16  
适用温度: -15-130°C  
适用介质: 水、气、油等  
Size: 2"-48"  
Nominal Pressure: PN10/PN16  
Working Temperature: -15-130°C  
Suitable Medium: Water, gas, oils, etc.

### ● 标准 Standard

设计标准: API594  
结构长度: EN558  
法兰连接: EN1092-1/2  
测试标准: EN12266  
Design standard: API594  
Face to Face: EN558  
Flange connection: EN1092-1/2  
Test Inspection: EN12266

### ● 主要零件材料 Main parts materials

零件名称 Part Name	材料 Material
阀体 Body	灰铸铁、球墨球铁/碳钢/不锈钢/铝青铜 Cast iron/Ductile iron/WCB/ Stainless steel/ AL-Bronze
阀板 Disc	球墨球铁/碳钢/不锈钢/铝青铜 Ductile iron/WCB/ Stainless steel/ AL-Bronze
阀轴 Stem	不锈钢/合金 Stainless steel/ Alloy
阀座 Seat	乙丙丁腈/氟橡胶 EPDM/NBR/VITON

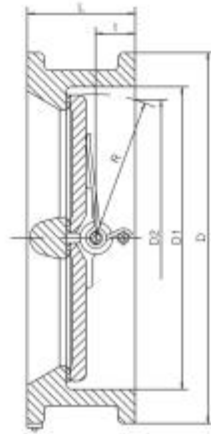

### ● 外形尺寸 Overall Dimension

规格 Size	D	D1	D2	L	R	t
DN50	107	65	43.3	43	28.8	19
DN65	127	80	60.2	46	36.1	20
DN80	142	94	66.4	64	43.4	28
DN100	162	117	90.8	64	52.8	27
DN125	192	145	116.9	70	65.7	30
DN150	218	170	144.6	76	78.6	31
DN200	273	224	198.2	89	104.4	33
DN250	328	265	233.7	114	127	50
DN300	378	310	283.9	114	148.3	43
DN350	438	360	332.9	127	172.4	45
DN400	489	410	381	140	197.4	52
DN450	539/555	450	419.9	152	217.8	58
DN500	594	505	467.8	152	241	58
DN600	690	624	572.6	178	295.4	73
DN700	800	720	680	229	354	98

DN800-1200等其他尺寸请与我们联系  
法兰连接尺寸符合EN1092-1/2, 也可根据用户需要满足其他不同的标准。

DN800-1200 please contact us.  
Flange connection EN1092-1/2, the specific dimensions for different standards are available in need.